
## KOMURA

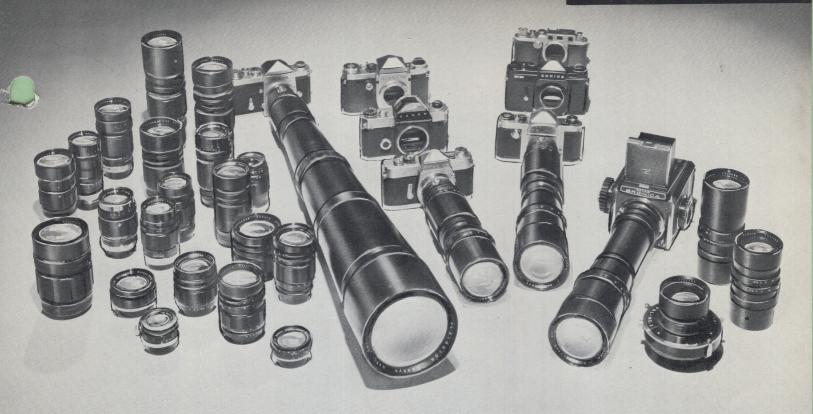

## KOMURA INTERCHANGEABLE LENSES

- Superbly Sharp—for Color and Black and White Photography
- 40 lenses—from 28mm to 800mm
- For Most Reflex, Rangefinder-coupled, and C-mount Cameras

Komura lenses offer high speed, superb sharpness and definition that meets the most critical demands of color and black and white photography. Lightweight, rugged construction, and simplified click-stop aperture settings contribute to their ease and convenience of use.

All Komura lenses from 28mm f3.5 to 200mm f4.5 couple directly to the camera. Lenses from 200mm f3.5 to 800mm f8 require adapters. This unique adapter feature significantly decreases inventory requirements, as the Dealer can now meet the lens needs of any customer, no matter what camera he owns, with just a basic stock of Komura lenses.

Komura lenses from 28mm to 800mm are also available in mounts to fit cameras with Leica—thread mounts.

In addition, there is a series of Komura lenses to fit the Bronica  $2\frac{1}{4}$  square single lens reflex camera.

A convenient lens guide, appearing on page 4, lists every Komura lens and the cameras it will fit. The guide indicates lens product number (and corresponding adapter number where required).

**EPOI INTERNATIONAL, LTD.,** 111 Fifth Avenue, New York 3, N. Y. Subsidiary of Ehrenreich Photo Optical Industries Inc. West Coast: Gary Lehmann, Inc. • 501 Folsom St., San Francisco 5, Calif.

# KOMURA

## KOMURA WIDE ANGLE LENSES

Ideal for pictures in confined areas, interiors and scenics. They provide a wider range and greater depth-of-field than normal lenses. They are made in fixed mounts to fit specific cameras. All supplied with leather case, lens hood and cap.



28mm f3.5 KOMURA LN30010-Features 7 elements. 75° angle of view. Click-stops to f16. Focuses to 3.5': Accepts 43mm screw-in filters. Fits Leica Thread Type.



35mm f2.8 KOMURA LN30021-Features 6 elements. 62° angle of view. Click-stops to F22. Focuses to 3.5': Accepts 43mm screw-in filters. Fits Leica Thread Type.



Features 7 elements. 62° angle of view. Click-stops to f22. Focuses to 2'. Accepts 55mm screw-in filters. LN30033, for Praktica LN30034, for Exacta LN30036, for Nikon F, Nikkorex F



36mm f1.8 KOMURA LN30043—Features 7 elements. 61° angle of view. Click-stops to f16. Focuses to 3.5'. Accepts 58mm screw-in filters. Fits Leica Thread Type.



**TELEPHOTO LENSES** 

Komura Telephoto Lenses Coupling Directly to Cameras



135mm f2.3 KOMURA Features 5 elements, 18° angle of view. Click-stops to f16. Focuses to 5'. 62mm screw-in filters. LN30121, for Praktica LN30122, for Exakta LN30125, for Exakta LN30123, for Nikon F, Nikkorex F LN30123, for Canon Reflex



135mm f2.0 KOMURA Features 5 elements. 18° angle of view. Click-stops to f16. Focuses to 5'. 72mm screw-in filters. LN30132, for Praktica LN30133, for Exakta LN30136, for Minolta LN30134, for Nikon F, Nikkorex F LN30135, for Canon Reflex



200mm f4.5 KOMURA Features 4 elements. 12° angle of view. Click-stops to f22. Focuses to 8'. 55mm screw-in filters. LN30144, for Praktica LN30145, for Exakta LN30143, Leica Thread Type. Re-quires reflex housing



### **KOMURA REFLEX HOUSING**

to

The Komura Reflex Housing converts rangefinder cameras such as Leica, Canon, Tower and others having an identically threaded lens flange, into an efficient single lens reflex.

The lens screws directly into the reflex housing, which then screws directly into the reflex housing, composing, focusing and depth-of-field can all be checked in the upright image seen in the housing's ground glass. Depressing the cable release lifts the mirror out of viewing position, and fires the shutter. (See lens guide for application).

### **LEICA LENSES**

Komura lenses to fit rangefinder cameras with Leica thread mounts, (Leica, Canon, Tower, Leotax, Nicca) are available from 28mm wide angle to 800mm telephoto. These lenses are described in detail elsewhere on this page. See lens guide (page 4) for application.

LN30010	28mm f3.5
LN30021	35mm f2.8
LN30043	36mm f1.8
LN30071	105mm f2.8
LN30085	105mm f2.0
LN30097	135mm f3.5
LN30109	135mm f2.8

LN30143	200mm f4.5	
LN30155	200mm f3.5	
LN30160	300mm f5.0	
LN30165	400mm f6.3	
LN30170	500mm f7	
LN30175	800mm f8	

The telephoto lens gives you a magnified image, allows you to add detail to distant subjects, to take candids from afar, and to get portraits without risk of distortion.

Komura lenses from 200mm f3.5 to 800mm f8 require an interchangeable adapter mount. The 200mm f4.5 and all shorter focal lengths are made in fixed mounts which fit specific cameras.

### Komura Telephoto Lenses Requiring Adapters

The five Komura lenses from 200mm f3.5 to 800mm f8 fit more than thirty different make reflex cameras by means of a unique interchangeable adapter mount system. They fit rangefinder cameras having Leica thread type mounts with the Komura Reflex Housing. In addition, these lenses also fit 16mm movie cameras with "C" mounts. Lenses and adapters are listed in the lens guide on page 4.



200mm f3.5 KOMURA LN30155—Features 5 ele-ments. 12° angle of view. Click-stops to f22. Fo-cuses to 8'. Accepts 62mm screw-in filters.




300mm f5 KOMURA LN30160-Features 4 elements. 8° angle of view. Click-stops to f64. Fo-cuses to 16'. Accepts Accepts 62mm screw-in filters.



400mm f6.3 KOMURA LN30165—Features 4 ele-ments. 6° angle of view. Click-stops to f45. Fo-cuses to 18'. Accepts 67mm screw-in filters.



500mm f7 KOMURA LN30170—Features 4 ele-ments. 5° angle of view. Click-stops to f64. Fo-cuses to 26'. Accepts Accepts 77mm screw-in filters.



800mm f8 KOMURA LN30175-Features 2 elements. 3° angle of view. Click-stops to f32. Fo-cuses to 65'.

#### **ADAPTERS**

Komura telephoto lenses, from 200mm f3.5 to 800mm f8 use a unique interchangeable adapter system which allows them to fit a variety of 35mm reflex cameras. One end of the adapter screws on the rear of the lens, and the other fits the specified camera mount. Since many reflex cam-eras have similar mounts—any given Komura lens, such as the 400mm f6.3—may fit several dif-ferent make 35mm cameras by the use of one adapter.

## KOMURA

### ACCESSORIES

#### KOMURA FILTERS

Komura filters are made of the finest optical glass. They are precision ground to plan— parallel optical flats—hard coated on both sides. The filters are the screw-in type, have front threaded rims to accept Komura screw-in lens hoods and caps.

AC30250 AC30251 AC30252 AC30252 AC30260 AC30260 AC30261 AC30261 AC30261 AC30275 AC30277 AC30277 AC30277 AC30277 AC30277 AC30277 AC30277 AC30277 AC30277 AC30277 AC30279 AC30279 AC30285 AC30285 AC30290 AC30290 AC30255 AC30255 AC30255 AC30256	Filter, sc Filter, sc	rew-in, 43mm rew-in, 43mm rew-in, 43mm rew-in, 43mm rew-in, 48mm rew-in, 48mm rew-in, 48mm rew-in, 55mm rew-in, 55mm rew-in, 55mm rew-in, 55mm rew-in, 55mm rew-in, 55mm rew-in, 55mm rew-in, 58mm rew-in, 58mm rew-in, 58mm rew-in, 62mm rew-in, 62mm rew-in, 67mm rew-in, 67mm rew-in, 67mm rew-in, 67mm rew-in, 72mm rew-in, 72mm rew-in, 72mm rew-in, 72mm	Y-2 Orange Orange VV Haze Y-2 Orange Red UV Haze Y-2 Orange Red Orange Red UV Haze Y-2 Orange Red UV Haze Y-2 Orange Red Orange Red Orange Red Orange Red Orange Red Orange Red Orange Red Orange Red Orange Red Orange Red Orange Red Orange Red Orange Red Orange Red Orange Red Orange Red Orange Red Orange Red Orange Orang Orange Orang Orange Orange
AC30298		rew-in, 77mm	кеа
		FACTORS	
UV	Y-2	Orange	Red
ID	1.7D	3D	6D

### KOMURA SCREW-IN LENS HOODS AND CAPS

2.5T

1.7D 1.2T

IT

Komura lens hoods attach quickly and securely. They can be reversed on the lens, and covered with the lens cap, for convenient carrying.

ACR30230 ACR30231 ACR30232	Lens Hoo		43mm for		)5 f2.8,
ACR30233 ACR30234 ACR30234 ACR30235 ACR30235 ACR30236	Lens Hoo Lens Hoo Lens Hoo Lens Hoo Lens Hoo	d, screw-in, d, screw-in, d, screw-in, d, screw-in,	55mm W. 55mm for 58mm for	A. for 35 f2.5	1.8
ACR30237 ACR30238 ACR30239 ACR30240	Lens Hoo Lens Hoo Lens Hoo	d, screw-in, d, screw-in,	67mm Sh 72mm for	ort F.L. for 8 135 f2	5 f1.4
LENS	FILTER	HOOD	LENS	FILTER	HOOD
28 f3.5 35 f2.8 35 f2.5 36 f1.8 85 f1.4 105 f2.8 105 f2.5 105 f2.0 135 f3.5	43mm 43mm 55mm 58mm 67mm 48mm 48mm 58mm 48mm	ACR30231 ACR30230 ACR30234 ACR30235 ACR30238 ACR30232 ACR30232 ACR30232 ACR30232	135 f2. 135 f2. 135 f2. 200 f4. 200 f3. 300 f5. 400 f6. 500 f7.	3 62mm 0 72mm 5 55mm 5 62mm 0 62mm 3 67mm	ACR30233 ACR30236 ACR30239 ACR30234 ACR30236 ACR30236 ACR30237 ACR30240

### **KOMURA VIEWFINDERS**

Optical viewfinders are supplied with all Leica thread type mount lenses. These lenses couple directly to the camera rangefinder.

VF30220, for 35mm lens VF30221, for 105mm lens VF30222, for 135mm lens VF30223, for 200mm f4.5 lens



'C' MOUNT ADAPTER

16mm movie cameras with 'C' mounts will accept Komura lenses from 200mm f3.5 to 800mm f8 by means of special adapters. (See lens guide for application).



### **BRONICA LENSES**

Komura lenses from 200mm f3.5 to 500mm f7 have been designed in mounts to fit the Bronica  $2^{1}/_{4}$  square single lens reflex camera. These lenses offer the same superb optical quality, sharpness and definition as the Komura lenses for 35mm photography. They are supplied with case, lens hood, and 2 close-up extension tubes.

		200mm f3.5 KOMURA									
.N30156-5	elements.	23° angle of view. Stops to f22. Focuses to 1	10'.								
		300mm f5 KOMURA									
.N30161-4	elements.	15° angle of view. Stops to f32. Focuses to 1	18.								
400mm f6.3 KOMURA											
N30166-4	elements.	11° angle of view. Stops to f45. Focuses to 3	30'.								
		500mm f7 KOMURA									
N30171-4	elements.	9° angle of view. Stops to f45. Focuses to 4	44'.								

KOMURA

KOMURA

LENS

GUIDE

This chart shows the most popular single lens reflex and rangefinder-coupled cameras that each Komura lens will fit.

### 1-TO LOCATE A LENS

a. Lenses up to 200mm (includes 200mm f4.5)

These Komura lenses, listed to the left of the heavy vertical line, fit directly on the camera body (200mm f4.5 requires reflex housing). These include lenses to fit rangefinder cameras with Leica thread mounts (Leica, Canon, Tower, Leotax, Nicca). They are designed to couple to the camera's rangefinder, and are supplied with an optical finder.

b. Lenses/from 200mm f3.5 to 800mm f8 (does not include 200mm f4.5)

The five lenses listed to the right of the heavy vertical line use a unique interchangeable adapter mount system, which allows them to fit more than 30 different make single lens reflex cameras. The *adapter* required for each of these lenses is indicated by a 'letter' shown next to the *lens* product number in the guide. The letter is referenced to the actual number by which the adapter can be ordered, in a table below the lens guide.

These same lenses will also fit rangefinder cameras having Leica thread mounts, by means of a reflex housing.

2 — ORDERING AND STOCKING

The Komura lens guide facilitates 'ordering' and 'stocking'. At a glance, the Dealer can see which lenses a particular camera will accept, or the different cameras any one lens will fit. Since every Komura lens, its product number and the cameras it will fit, is listed, the guide also serves as an immediate reference in answering any consumer inquiry.

#### 3-HOW TO USE THE LENS GUIDE

*Example*: Your customer owns a Pentax camera and wishes to purchase a 135mm f3.5 Komura lens. By following the name of the camera (listed on the left side of the guide) across to the box under 135mm f3.5, you can immediately determine the correct lens number (LN30098).

	28mm f3.5	35mm f2.8	35mm f2.5	36mm f1.8	85mm f1.4	105mm f2.8	105mm f2.5	105mm f2.0	135mm f3.5	135mm f2.8	1 <b>35mm</b> f2.3	1 <b>35mm</b> f2.0	200mm f4.5	200mm f3.5	300mm f5.0	400mm f6.3	500mm f7.0	800mm f8
ALPA														®LN30155	®LN30160	®LN30165	®LN30170	®LN30175
BRONICA													the state	LN30156	LN30161	LN30166	LN30171	
CANON (RF)	LN30010	LN30021		LN30043		LN30071		LN30085	LN30097	LN30109	Contraction of		*LN30143	*LN30155	*LN30160	*LN30165	*LN30170	*LN30175
CANON REFLEX			LN30037		LN30063		LN30078	LN30089	LN30101	LN30113	LN30124	LN30135		®LN30155	®LN30160	®LN30165	®LN30170	®LN30175
©EXA ©EXA II EXAKTA			LN30034	-	LN30061		LN30076	LN30087	LN30099	LN30111	LN 30122	LN30133	LN 30145	®LN30155	®LN30160	®LN30165	®LN30170	®LN30175
<sup>®</sup> HONEYWELL PENTAX			LN30033		LN30060		LN30075	LN30086	LN30098	LN 30110	LN30121	LN30132	LN30144	@LN30155	@LN30160	@LN30165	@LN30170	&LN30175
KONICA FS FP			LN30039		LN30065		LN30080	LN30091	LN30103	LN30115	LN30126	LN30137		@LN30155	@LN30160	@LN30165	@LN30170	@LN30175
LEICA (RF)	LN30010	LN30021		LN30043		LN30071		LN30085	LN30097	LN30109			*LN30143	*LN30155	*LN30160	*LN30165	*LN30170	*LN30175
MAMIYA PRISMAT			LN30034		LN30061		LN30076	LN30087	LN30099	LN30111	LN30122	LN30133	LN30145	®LN30155	®LN30160	®LN30165	®LN30170	®LN30175
MINOLTA SR 1, 2, 3, 7			LN30038		LN 30064		LN30079	LN30090	LN30102	LN30114	LN30125	LN30136		©LN30155	©LN30160	©LN30165	©LN30170	©LN30175
MIRANDA			LN30040		LN30066		LN30081	LN30092	LN30104	LN30116	LN30127	LN30138		®LN30155	®LN30160	®LN30165	®LN30170	®LN30175
NIKON F NIKKOREX F			LN30036		LN 30062		LN30077	LN30088	LN30100	LN30112	LN30123	LN30134		©LN30155	@LN30160	@LN30165	@LN30170	@LN30175
<sup>®</sup> PRAKTICA			LN30033		LN30060		LN30075	LN30086	LN30098	LN30110	LN30121	LN30132	LN30144	@LN30155	@LN30160	@LN30165	@LN30170	&LN30175
PETRI V2 PETRI PENTA PETRIFLEX V PETRIFLEX 7			LN30041		LN30067		LN30082	LN30093	LN30106	LN30117	LN30128	LN30139		@LN30155	©LN30160	©LN30165	©LN30170	©LN30175
TOPCON R B.C. SUPER D			LN30034		LN30061		LN30076	LN30087	LN30099	LN30111	LN30122	LN30133	LN30145	®LN30155	®LN30160	®LN30165	®LN30170	®LN30175
VISOFLEX II														®LN30155	®LN30160	<b>&amp;LN30165</b>	®LN30170	®LN30175
YASHICA PENTAMATIC	*				-Mar							15	54	@LN30155	@LN30160	@LN30165	®LN30170	®LN30175
YASHICA PENTA J & J3		-	LN30033		LN30060		LN30075	LN30086	LN30098	LN30010	LN30121	LN30132	LN30144	®LN30155	@LN30160	@LN30165	@LN30170	&LN30175
"c" MOUNT MOVIE CAMERAS														@ &LN30155	@LN30160	@ &LN30165	@ & <b>ln30170</b>	@LN30175

① Exa 1, 1a and 1b will accept Komura lenses from 28mm to 105mm. The internal construction of these models makes it impossible to use longer lenses without image cut-off. While this cut-off cannot be seen on the ground glass, it will appear on the film.

②Lenses for Pentax and Praktica will also fit: Contax D & S; Pentacon; Hexacon; Consol. ADAPTERS

\* Requires Komura reflex housing.